

**VALUE**<sup>®</sup>

Making Your Job More Enjoyable

2023 VALUE: V1.0



**VALUE**<sup>®</sup>

**VALUE Mechanical & Electrical Products CO., LTD**

Add: No. 5 Third Street, East Industrial Park, Wenling, Zhejiang, China


Tel: +86-576-86191959

Fax: +86-576-86191957

Email: [value@worldvalue.cn](mailto:value@worldvalue.cn)

[www.worldvalue.cn](http://www.worldvalue.cn)

# Quick Coupler

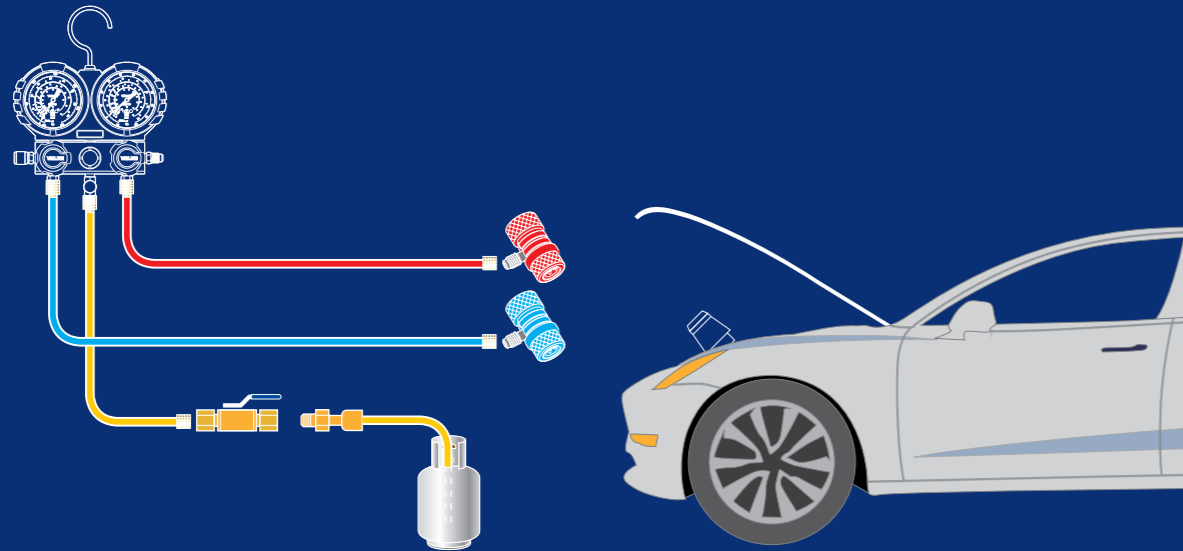

# Quick-connect

### Easy to Use

- Automatically lock, one-step connection

### Durable

- High strength, high pressure resistance
- Long service life

### High Oil-resistance, Anti-seeping


- 3-layer reinforce refrigerant tube, Effective avoid seeping
- Longitudinal die-casting seal, prevent leakage of connector

VHF quick couples series

Model	VHF-SA	VHF-SB	VHF-SC	VHF-SY
Description	1/4" SAE	M14 × 1.5	3/8" SAE	M12 × 1.5

# Refrigerant Hose


3-layer anti-sweeping refrigerant hose

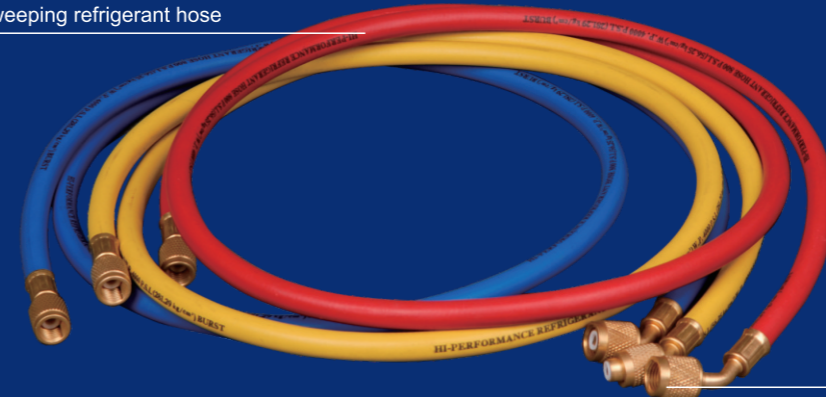

Pure copper connector



Check Valve

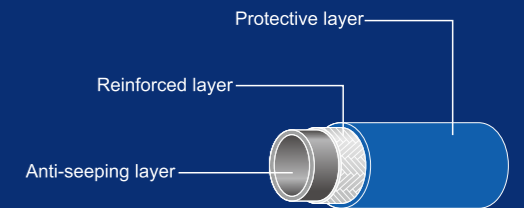

# High strength

### Wide Range of Application

- It's suit for R410A, R134a, R22, etc

### Safe and Reliable

- Rubber tube reinforced thickness 12mm, Ensure safe and reliable using

### High Oil-resistance, Anti-seep

- 3 layer reinforce refrigerant tube, Effective avoid seeping
- Pure copper connector, Longitudinal die-casting

### Check Valve

- Effectively complete the pipeline switching

Model	R410A	R134a
Working pressure	0 ~ 800 psi	0~500 psi
VRP-U-R	1/4"-5/16"	1/4"-1/4"
VRP-U-Y	1/4"-1/4"	1/4"-1/4"
VRP-U-B	1/4"-5/16"	1/4"-1/4"
Length	90 cm 120 cm 150 cm	

Model	R410A	R134a, R22, R12	R134a, R22, R12
Working pressure	0~800 psi	0~500 psi	0~500 psi
VRP-C-R	1/4"-5/16"	1/4"-1/4"	1/2" M14x1.5
VRP-C-Y	1/4"-1/4"	1/4"-1/4"	1/2" -1/2"
VRP-C-B	1/4"-5/16"	1/4"-1/4"	1/2" M14x1.5
Length	90 cm 120 cm 150 cm		